

E850

Premium Emulsion

TRIM[®] E850 is a proprietary blend of new vegetable-based technology and premium traditional lubricity additives to yield a very high performance, low management metal removal fluid. This premium emulsion product is robust enough to deliver extended useful life and avoid rancid odours normally associated with traditional emulsions. The optimised lubricity and extreme pressure package delivers exceptional surface finish and tool life on difficult to machine aluminium alloys, inconel, titanium, stainless and high tensile strength steels.

Soluble Oils



Performance soars with E850.

A case for E850:

Geared up for production: A major producer of precision commercial and military aerospace components has seen impressive results using E850 for their classified titanium forging machining of under-carriage steering equipment for military aircraft such as the F-16, F-22, F-35, AH-64, B1, C130, CH47, UH 60, S70i, and T38.

After a successful trial, another general machining company made the switch to E850 because they needed a chlorine-free product — and chose E850 for its superior lubricity on stainless steel and aluminum.

Performance soars with E850.



Choose E850:

- Delivers exceptional lubricity
- Very long sump life and low carry-off rates result in low operating cost
- Low foam even in soft water areas
- Hard water tolerant
- Non-chlorinated and non-sulphurised extreme pressure (EP) additives control built-up edge (BUE) in tough operations on aerospace materials
- Compatible with all materials excluding magnesium
- Easily recycled or disposed of without special handling or equipment
- Will run effectively for long periods without the need for costly additives

E850 especially for:

Applications — boring, centerless grinding, deep hole drilling, drilling, heavy-duty machining center work, high-pressure, high-volume, high-speed milling, high-speed turning, milling, reaming, roll threading, sawing, tapping, thread forming, thread rolling and turning

Metals — aerospace aluminium alloys, brass, bronze, cast aluminium, composites, copper, exotic alloys, heat-treated steel, high tensile-strength steel, high-carbon steel, nickel alloys, plastics, stainless steels and titanium

Industries — aerospace, automotive and energy

E850 is free of — boron, chlorine, copper, formaldehyde releasers, halogens, nitrites and phenols

E850

Premium Emulsion

Application Guidelines

- It can run at lower concentrations for higher speed operations (where heat removal is the key issue).
- Higher concentrations are recommended on soft, gummy materials and for lower speed operations where friction reduction and control of built-up edge are critical.
- Concentrations above 7% provide the best sump life.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions Authorised Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at +44 (0)1449 726808.

Physical Properties Typical Data


Colour (Concentrate)	Light brown
Odour (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 120°C
pH (Concentrate as Range)	9.5 - 10.0
pH (Typical Operating as Range)	9.0 - 9.5
Coolant Refractometer Factor	1.0

Recommended Metalworking Concentrations

Light duty	5.0% - 8.0%
Moderate duty	8.0% - 10.0%
Heavy duty	10.0% - 15.0%
Design Concentration Range	5.0% - 15.0%



Concentration by % Brix

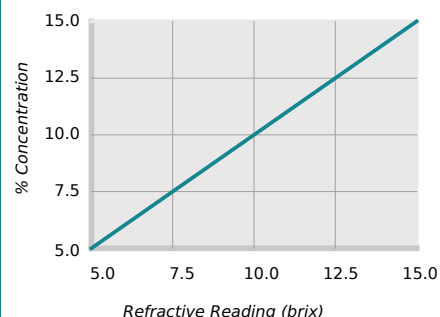

$\% \text{ Concentration} = \text{Refractive Reading} \times \text{Refractive Factor}$
Coolant Refractometer Factor % Brix = 1.0

Health and Safety

For further information, see the most recent SDS, which is available directly from Master Fluid Solutions or from your Master Fluid Solutions Authorised Distributor.

E850

Premium Emulsion

Mixing Instructions

- Recommended usage concentration in water: 5.0% - 15.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: apps.masterfluidsolutions.com/makeup/
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

Ordering Information

20-litre pail

204-litre drum

1000-litre IBC

TRIM® E850 | ©2009-2019 Master Fluid Solutions™ | 2019-07-08



Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Before using on any metals or applications not specifically recommended, consult Master Fluid Solutions.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.

TRIM® is a registered trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.

Master STAGES™ and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

https://2trim.us/di/?plr=E850*en*eu



Master Fluid Solutions
33 Maitland Road, Lion Barn Business Park
Needham Market
Suffolk, IP6 8NZ
United Kingdom

+44 (0) 1449-726800
info@masterchemical.co.uk
masterfluidsolutions.com/eu/en/

