


# MicroSol® 519

## Premium Microemulsion

TRIM® MicroSol® 519 is a medium to high lubricity, semisynthetic, microemulsion coolant. The formula provides excellent cooling and mechanical lubricity, along with the machine friendly characteristics you expect from a premium TRIM® coolant. Whilst it is particularly suited to machining and grinding cast iron and steel, it does very well in mixed metal situations and is a proven performer on aluminium alloys, stainless steels and titanium.

### MicroSol

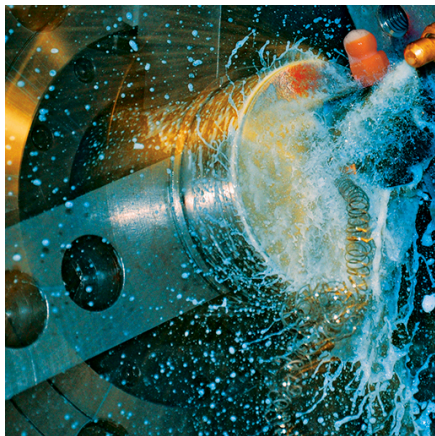

#### For ultimate performance:

*TRIM® MicroSol® semisynthetic microemulsion coolants deliver high-performance lubricity and ultimately lowers costs. Achieve precision parts, exceptional tool life, extended sump life, assured regulatory compliance, and greater profitability with the MicroSol product just right for your production.*

*Designed to meet the rigorous demands of the aerospace, medical, automotive, and high production, precision parts manufacturing industries, there's a MicroSol to answer your concerns, ramp up your production, and boost your bottom line.*



#### Choose MicroSol 519:

- Formaldehyde releaser and boron free
- Low foaming for modern high-pressure, high-volume applications
- Keeps machines very clean while leaving a soft fluid film for ease of cleaning and reduced maintenance
- Excellent alternative to high mineral oil soluble oils on high-silica aluminium alloys
- Greatly extends useful life without the need for tank side biocides or fungicides
- Optimised combination of cooling and lubricity for titanium machining applications
- Provides superior corrosion inhibition on all ferrous and nonferrous metals
- Uses standard metalworking recycling and disposal techniques

#### MicroSol 519 especially for:

**Applications** — band sawing, belt grinding, Blanchard grinding, corrosion inhibition, cylindrical form grinding, double disc grinding, drilling, high-pressure, high-volume, in-feed centerless grinding, internal grinding, plain grinding, reaming, roll threading, surface grinding, surface milling, tapping, thread forming, through-feed centerless grinding and turning

**Metals** — aerospace aluminium alloys, brass, bronze, cast iron, copper and ferrous metals

**Industries** — aerospace, automotive, compressor, energy, firearms & ammunitions, machine tool manufacturers and medical

**MicroSol 519 is free of** — boron and formaldehyde releasers

# MicroSol<sup>®</sup> 519

## Premium Microemulsion

### Application Guidelines

- MicroSol 519 performs well where traditional soluble oils may not cool sufficiently.
- In mixed-metal situations, concentration control is critical to fight galvanic corrosion (>7%).
- Running at or above 7% offers the best sump life and corrosion inhibition on cast iron chips.
- MicroSol 519 is not recommended for use on very reactive metals such as magnesium.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions Authorised Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at +44 (0)1449 726808.

### Physical Properties Typical Data


Colour (Concentrate)	Amber
Odour (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 160°C
pH (Concentrate as Range)	9.2 - 10.2
pH (Typical Operating as Range)	9.0 - 10.0
Coolant Refractometer Factor	2.0

### Recommended Metalworking Concentrations

Light duty	5.0% - 7.0%
Moderate duty	7.0% - 9.0%
Heavy duty	9.0% - 10.0%
Design Concentration Range	5.0% - 10.0%



### Concentration by % Brix

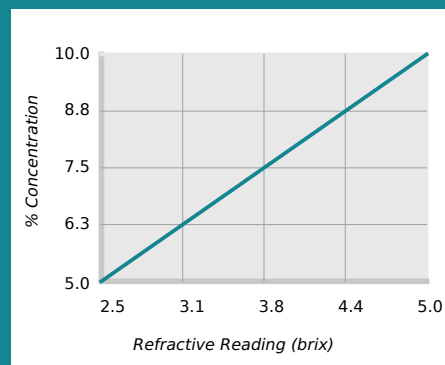

% Concentration = Refractive Reading x Refractive Factor  
Coolant Refractometer Factor % Brix = 2.0

### Health and Safety

For further information, see the most recent SDS, which is available directly from Master Fluid Solutions or from your Master Fluid Solutions Authorised Distributor.

# MicroSol® 519

## Premium Microemulsion

### Mixing Instructions

- Recommended usage concentration in water: 5.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluidsolutions.com/makeup/](https://apps.masterfluidsolutions.com/makeup/)
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

### Ordering Information

20-litre pail

204-litre drum

1000-litre IBC

TRIM® MicroSol® 519 | ©2015-2019 Master Fluid Solutions™ | 2019-07-08



### Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Before using on any metals or applications not specifically recommended, consult Master Fluid Solutions.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.

TRIM® and MicroSol® are registered trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

Master STAGES™ and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?plr=MS519\\*en\\*eu](https://2trim.us/di/?plr=MS519*en*eu)



Master Fluid Solutions  
33 Maitland Road, Lion Barn Business Park  
Needham Market  
Suffolk, IP6 8NZ  
United Kingdom

+44 (0) 1449-726800  
[info@masterchemical.co.uk](mailto:info@masterchemical.co.uk)  
[masterfluidsolutions.com/eu/en/](https://masterfluidsolutions.com/eu/en/)

