

# SC440

## Low oil Semisynthetic

TRIM® SC440 is a low foam, semisynthetic coolant specifically formulated for machining and grinding of cast iron and steel. This unique formulation ensures low levels of foam not generally seen with other semisynthetic products especially in soft water areas. This clean running formulation also prevents the loading of grinding wheels, ensuring good surface finishes and minimal burning.

### Semisynthetics



#### Cutting edge solutions:

*TRIM® semisynthetics offer the cooling and lubricity of a synthetic without the higher oil content of an emulsion. Designed to operate at higher SFPM, semisynthetics perform well on many operations including face milling, cut-off turning, grinding, tapping, and drilling — depending on the specific product.*

*Semisynthetics are compatible with alloy steels, tool steels, cast irons, copper alloys, as well as plastics and composites. With less carryoff, semisynthetics use less material — it all adds up to lower costs.*



#### Choose SC440:

- Formaldehyde releaser and boron free
- Provides superior corrosion inhibition on all ferrous metals
- Fast wetting to get the fluid to the point of cut and keep grinding wheels clean
- Low foaming for modern high-pressure, high-volume applications
- Keeps machines very clean while leaving a soft fluid film for ease of cleaning and reduced maintenance
- Greatly extends useful life without the need for tank side biocides or fungicides
- Uses standard metalworking recycling and disposal techniques

#### SC440 especially for:

**Applications** — grinding and machining

**Metals** — cast iron and steels

**Industries** — automotive and bearing

**SC440 is free of** — boron, chlorine, DEA, formaldehyde releasers and phenolic compounds

# SC440

## Low oil Semisynthetic

### Application Guidelines

- TRIM SC440 will run effectively for long periods without the need for costly additives.
- It can run at lower concentrations for higher speed operations (where heat removal is the key issue).
- Higher concentrations are recommended on soft, gummy materials and for lower speed operations where friction reduction and control of built-up edge are critical.
- Concentrations above 7% provide the best sump life.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions Authorised Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at +44 (0)1449 726808.

### Physical Properties Typical Data


Colour (Concentrate)	Dark straw
Odour (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 100°C
pH (Concentrate as Range)	9.1 - 10.1
pH (Typical Operating as Range)	8.9 - 9.9
Coolant Refractometer Factor	2.5

### Recommended Metalworking Concentrations

Light duty	5.0% - 7.0%
Moderate duty	7.0% - 9.0%
Heavy duty	9.0% - 10.0%
Design Concentration Range	5.0% - 10.0%



### Concentration by % Brix

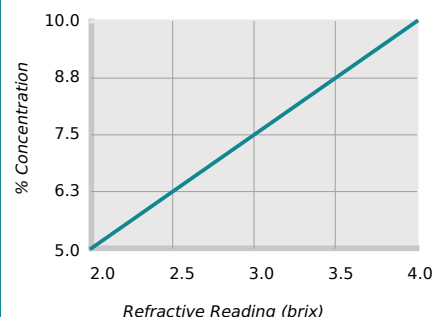

$\% \text{ Concentration} = \text{Refractive Reading} \times \text{Refractive Factor}$   
Coolant Refractometer Factor % Brix = 2.5

### Health and Safety

For further information, see the most recent SDS, which is available directly from Master Fluid Solutions or from your Master Fluid Solutions Authorised Distributor.

# SC440

## Low oil Semisynthetic



### Mixing Instructions

- Recommended usage concentration in water: 5.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluidsolutions.com/makeup/](https://apps.masterfluidsolutions.com/makeup/)
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

### Ordering Information

20-litre pail

204-litre drum

1000-litre IBC

TRIM® SC440 | ©2012-2019 Master Fluid Solutions™ | 2019-07-08

### Additional Information

- Use Master STAGES™ Whamex XT™ for a quick and thorough precleaning of your machine tool and coolant system.
- Before using on any metals or applications not specifically recommended, consult Master Fluid Solutions.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.

TRIM® is a registered trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.

Master STAGES™ and Whamex XT™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?plr=SC440\\*en\\*eu](https://2trim.us/di/?plr=SC440*en*eu)



Master Fluid Solutions  
33 Maitland Road, Lion Barn Business Park  
Needham Market  
Suffolk, IP6 8NZ  
United Kingdom

+44 (0) 1449-726800  
[info@masterchemical.co.uk](mailto:info@masterchemical.co.uk)  
[masterfluidsolutions.com/eu/en/](https://masterfluidsolutions.com/eu/en/)

